


TO AVOID ANY DAMAGE RELATED TO FREEZE / THAW.

- 1- Always make sure to have a least 3" space between the top seat of the pool and the boards of the deck.

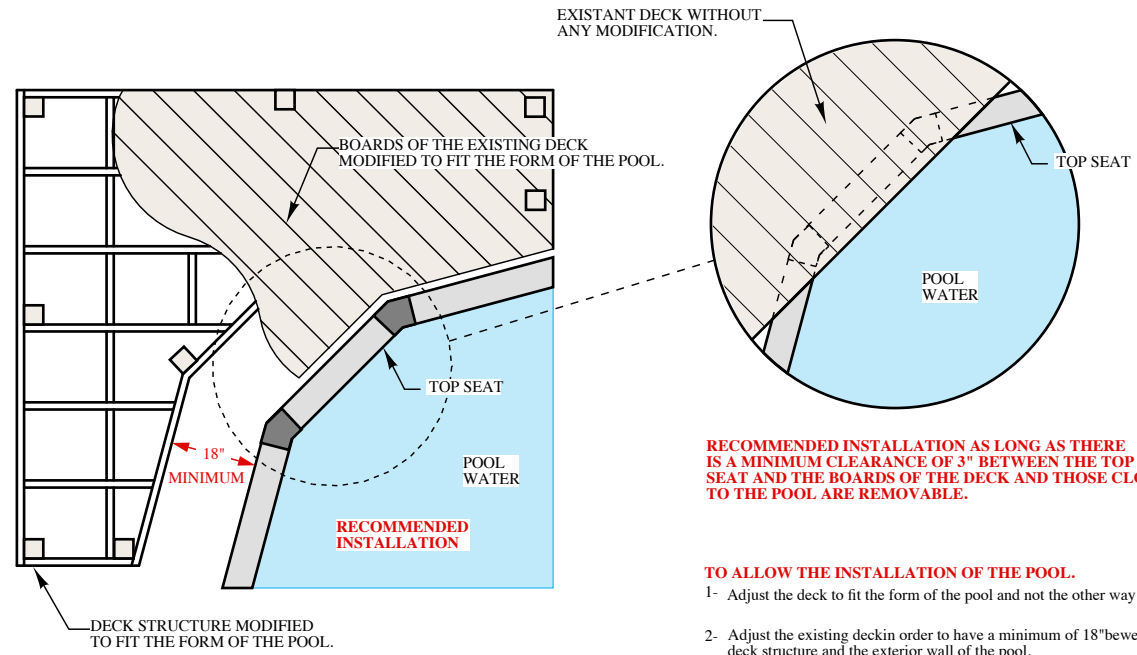


RECOMMENDED INSTALLATION AS LONG AS THERE IS A MINIMUM CLEARANCE OF 3" BETWEEN THE TOP SEAT AND THE BOARDS OF THE DECK AND THOSE CLOSEST TO THE POOL ARE REMOVABLE.

TO ALLOW THE INSTALLATION OF THE POOL.


- 1- Adjust the deck to fit the form of the pool and not the other way around.
- 2- Adjust the existing deck in order to have a minimum of 18" between the deck structure and the exterior wall of the pool.
- 3- Remove the boards of the deck that may be in the way for the installation of the pool and put them back once the installation is completed.

SUFFICIENT SPACE REQUIRED BETWEEN THE TOP SEAT AND THE FIRST LEVEL CHANGE ON THE DECK.

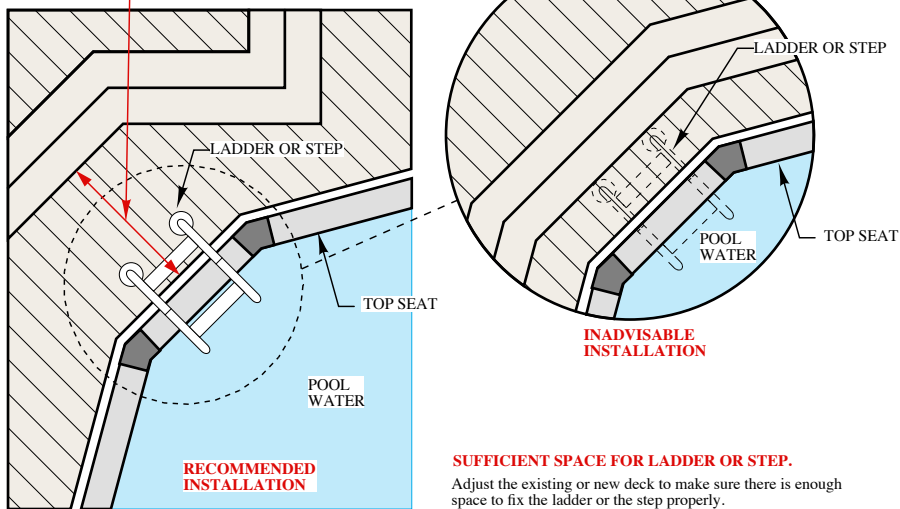


SUFFICIENT SPACE FOR LADDER OR STEP.

Adjust the existing or new deck to make sure there is enough space to fix the ladder or the step properly.

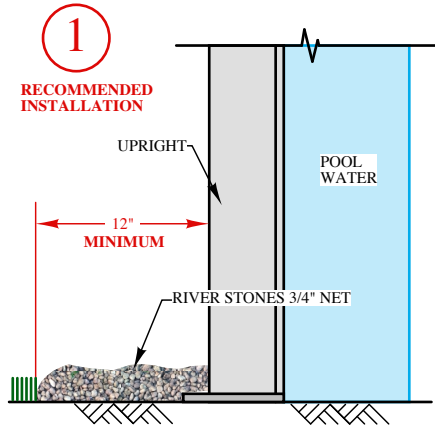

WHAT TO PUT AROUND DE BASE OF THE POOL.

- 1- Recommended : River stones 3/4" net to help the natural drainage and avoid the accumulation of water or humidity at the base of the pool. It is allowed to cover the rails with river stones too.
- 2- Do not put mulch because it keeps the humidity.
- 3- Do not put grass or soil directly on the pool wall because that would complicate the drainage.
- 4- Do not put bushes too close to the pool because that could favor the proliferation of insects that could damage the pool.
- 5- Do not put plastic edges because that would keep the wter and humidity at the base of the pool.

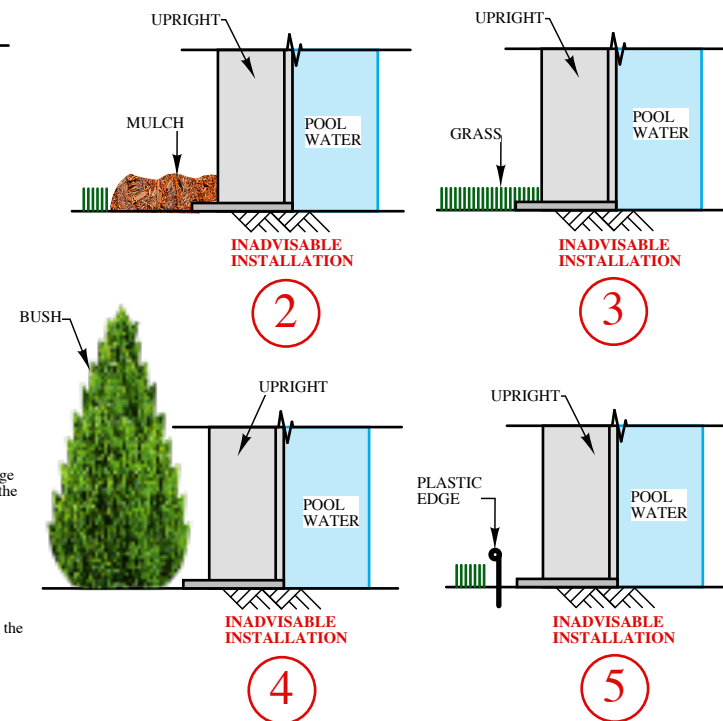

ABOVE GROUND POOL INSTRUCTIONS

Dessiné par: Draw by:	Échelle: Scale:	Date:
F.B.	N.T.S.	12/10/2017